

HE444



*Advanced Sensor Technology*


*Linear High Precision*

## *3D Analog Hall Sensor HE444*

*measures both magnetic field strength and direction*

### Features

- 3 separate, 100% identical, independent axes
- Very large magnetic field range, from a few  $\mu$ -Tesla to over 10 Tesla
- Magnetic axes cross in one point
- Very small linearity error, typically 0,1 % up to 1,5 T
- High sensitivity, low noise
- Very low offset voltage and drift
- Very wide operating temperature range
- Ceramic, small package
- Moves 3D Hall sensing into 6+ digits

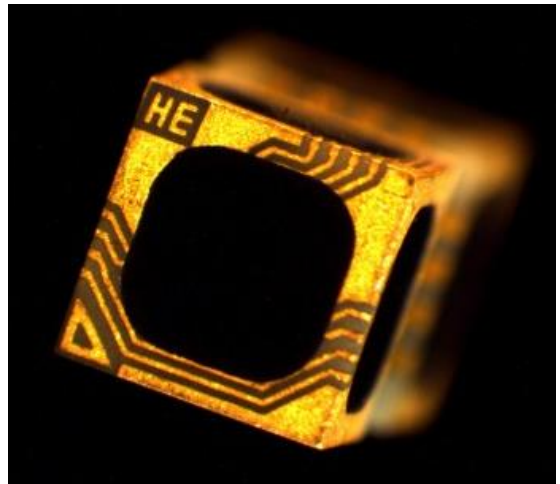


Our products are lead free devices, compliant with RoHS, REACH and 'Japan green' demands.

### Typical applications

- Universities, research facilities, particle accelerators, nuclear power plants
- Mapping of NMR, MRI scanners
- Mapping fields of small and large magnets with high resolution
- Measure oil pipe wall thickness/cracks from the inside
- Calibration of other 3D sensors
- Works in liquid Nitrogen and Helium
- Works at high temperatures in ovens

True size



**Asensor Technology AB**

Maskinvägen 6  
746 30 Bålsta  
Sweden

*When Performance Matters*



E-mail: [hallsensor@asensor.eu](mailto:hallsensor@asensor.eu)  
Phone: +46 8 590 755 10  
Phone (NL): +31 6 515 900 81  
[www.asensor.eu](http://www.asensor.eu)

# Using the HE444 sensor


All Asensor Technology Hall sensors can be used with DC current excitation, but also with AC or lock-in systems for extremely low noise. This enables very deep measurements, for example a lock-in amplifier at 1 kHz with 1 Hz bandwidth will show a noise around 10 to 20 nanoTesla.

The HE444 has a good temperature tracking between all axes. The sensor is by nature radiation hardened.

## Different packages HE444

### HE444 – Standard solder pad / bond pad version


The surface can be soldered, bonded with bond wires or micro welded

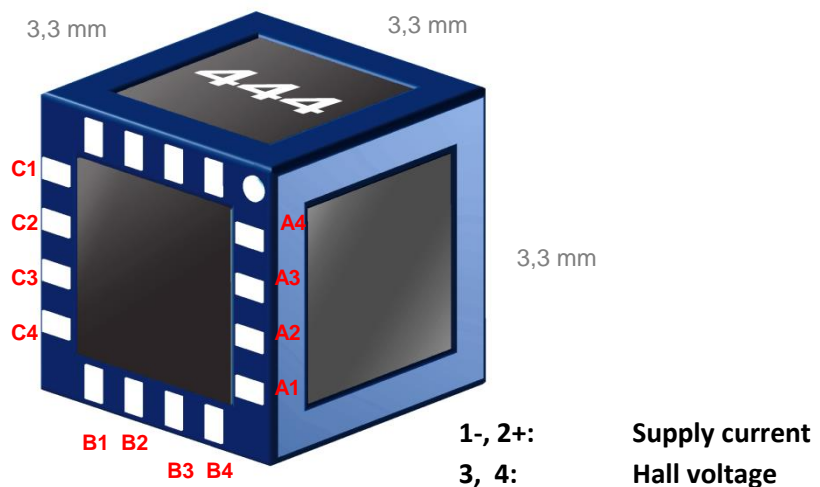

Note: component laser marking '444' or user defined, this picture shows the solder / bond pads at the bottom, marking can be at the top, this picture does not show all details

### HE444T / HE444HT – Wired versions

HE444 soldered on our T-PCB, with fine twisted pair wires welded to the golden pads of the PCB. The standard version, HE444T, has a maximum temperature of 125 °C. A version with high temperature wires, HE444HT, able to handle temperatures up to 200 °C, is also available. Wire length is 20 cm, other lengths deliverable on request. Parts can be delivered on customer specific PCB, flex foil or ceramics, thin/thick film. Minimum order quantities can apply.

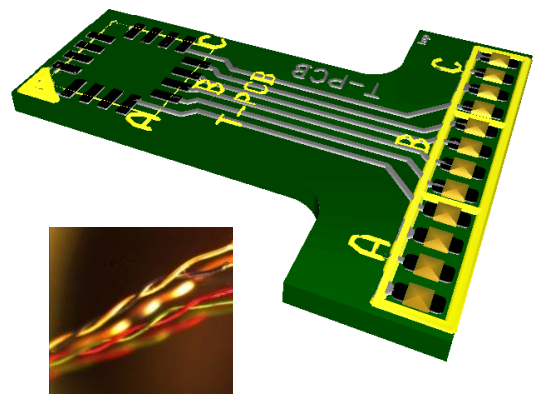

Pin	Function	Wire color HE444T 125°C	Wire color HE444HT 200°C
1	- supply current	Green	Green
2	+ supply current	Red	Red
3	Hall voltage	Blue	Black
4	Hall voltage	Gold	Gold



# Specifications HE444

Electrical specifications		Values
<b>Advised supply current</b>		0,2 to 4,0 mA recommended 2 mA*
<b>Open-circuit Hall voltage</b> B=1 T		typical 200 mV at I=2 mA min 180 to max 360
<b>Temperature coefficient of open-circuit Hall voltage</b> B=1 T, at 25°C		typical -0,015 %/K at I=2 mA min -0,02 to max 0,02
<b>Ohmic offset voltage</b> B=0 T		$\leq \pm 250 \mu\text{V}$ at I=1 mA $\leq \pm 500 \mu\text{V}$ at I=2 mA
<b>Temperature coefficient of ohmic offset voltage</b> B=0 T		typical $\leq 5$ ppm ( $< \pm 0,5 \mu\text{V/K}$ ) at I=2 mA
<b>Linearity of Hall voltage</b> at I=2 mA (per axis)T	B = $\pm 0$ to 1 T	$\leq \pm 0,2$ % typical $\leq \pm 0,1$ %
	B = $\pm 1$ to 2,4 T	Limit not specified typical $\leq \pm 0,2$ %
<b>Supply side internal resistance</b> B=0 T		450 to 650 $\Omega$ typical 500 $\Omega$
<b>Hall side internal resistance</b> B=0 T		450 to 850 $\Omega$ typical 500 $\Omega$
<b>Thermal conductivity in air</b>		Not specified
<b>Thermal conductivity soldered</b>		Not specified
<b>Bandwidth</b>		Not specified

\* Optimal signal to noise ratio and low power consumption

\*\* Variations within the same production batch are very small.

Absolute maximum ratings		Values
<b>Supply current per axis</b>		10 mA
<b>Operating temperature</b>	<b>HE444</b>	-40 to +150 °C
	<b>H-version (high temperature)</b>	-40 to +250 °C
	<b>T-version</b>	-40 to +125 °C
	<b>HT-version</b>	-40 to +200 °C

For very low (cryogenic down to a few Kelvin) or very high (over 200 °C, up to 250 °C) temperature applications, contact us for more information.